

Nature without barriers



Nature without barriers

Policy:

- create no unnatural barriers
- make main point accessible



Nature without barriers



Nature without barriers



Policy:

- create no unnatural barriers
- make main point accessible

Nature without barriers



A daytrip with a disabled person?



Nature without barriers



HELLING

△ 1 TOT 1:20

△ 2 TOT 1:16

△ 3 TOT 1:12

△ 4 TOT 1:8

△ 5 > 1:8

🪜 TRAP + AANTAL TREDEM

Nature without barriers



A = paved

B = half paved

C = unpaved (as a rule, can be used year round with hiking shoes and sufficiently sturdy and flat for a scooter)

D = rough (boots may be necessary part of the year, sandy areas and larger uneven surfaces allowed)


X = obstacle for wheelchair

* = boots often needed

Nature without barriers



Nature without barriers

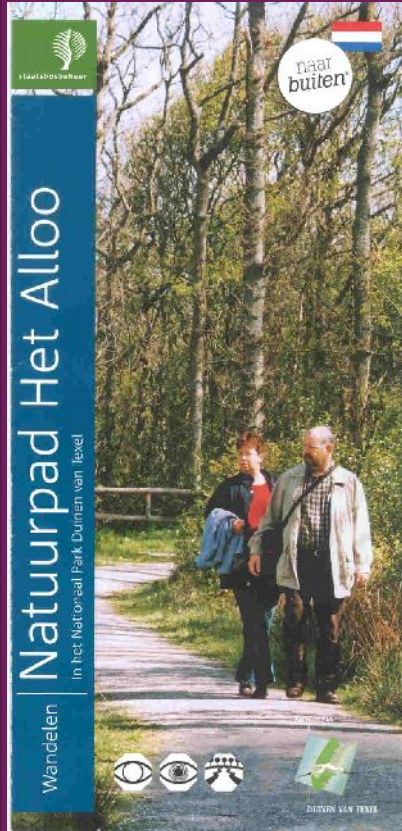

Nature without barriers




Demands to Access for All

from BT Countryside for All (Zones 1, 2 and 3) and the Countryside Agency (zone 4 and 5)



	Zone 1 Urban and Format Landscapes	Zone 2 Urban Fringe and managed landscapes	Zone 3 Rural and working landscapes	Zone 4 Rough landscape	Zone 5 Natural landscape
Path Surfaces	Hard, firm and smooth surface with very few loose stones and none bigger than 5mm	Hard and firm, surface with very few loose stones and none bigger than 10mm	Hard and firm with some loose stones and chippings not covering the whole surface. The stones should be no bigger than 10mm	Path possibly modified, not necessarily hard and firm (weather dependent) with some loose material bigger than 10mm and occasional tree roots (up to 100mm), potholes (up to 100mm) and short stretches «10m) of severe rutting. There may be breaks in the surface such as drainage channels which should be no	Path surface natural, unmodified
Path Widths	1200mm	1200mm	1000mm	more than 75mm Usable path width no less than 815mm wide	Path width not formalised
Width Restrictions	At least 815 mm for no more than 300 mm along path 1000 mm for no more than 1600 along path	At least 815 mm for no more than 300 mm along path 1000 mm for no more than 1600 along path	At least 815mm for no more than 300mm along path 915mm for no more than 1600 along path	Gates should be accessible to all people with mobility impairments	Gates should be accessible to all people with mobility impairments

Nature without barriers

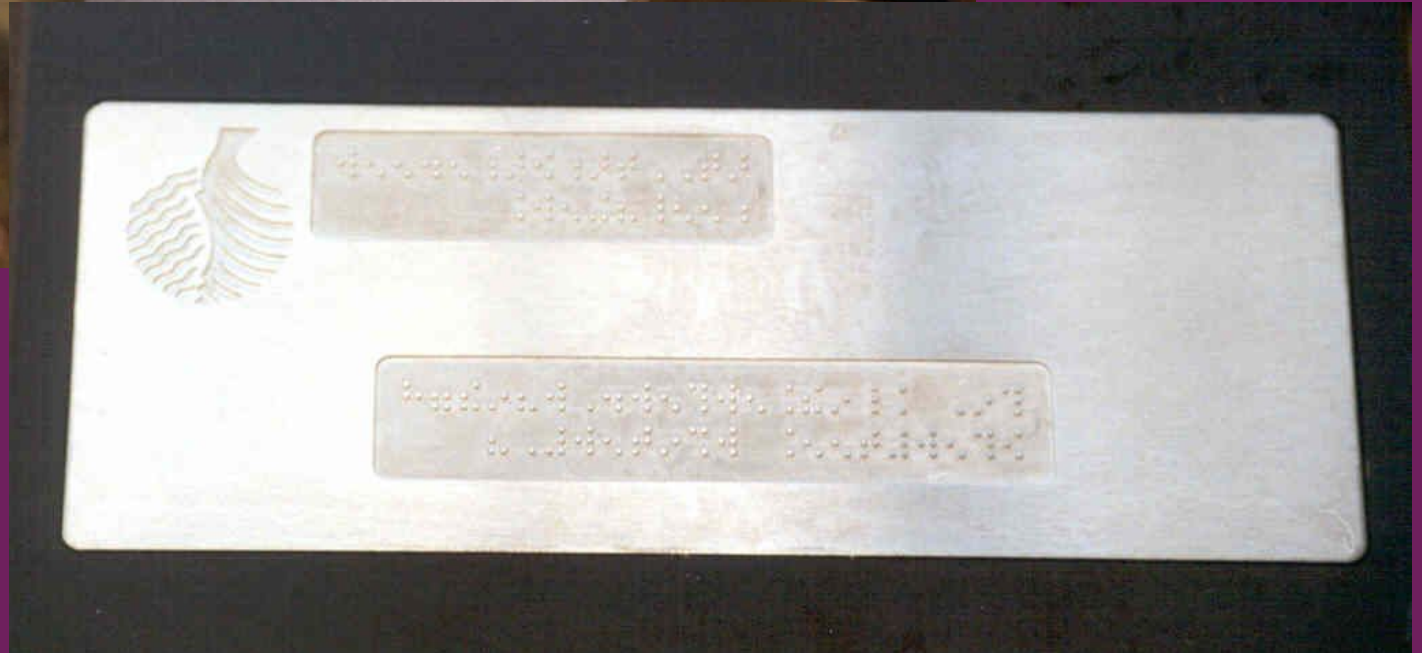

Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Texel, accessible Island?!



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers



Nature without barriers

